


Cylinder BL0T1*00H1

Disposable screw-down 3-kg/h cylinder for 3-phase immersed electrode humidifiers

Technical features


Single use (disposable) 3-phase steam cylinders suitable for:

- **KUE01*** humidification kits and
- 3-phase **humiSteam UE003Y/X*** humidifiers
- Body: PPh plastic, class HB according to UL94
- Steam outlet: \varnothing 23mm and 30mm
- Manifold connection: \varnothing 22mm
- Water volume: max 3,3 lt.
- Galvanised steel electrodes
- Electrode connection: threaded M5; 10mm nuts and isolating caps supplied
- AFS/high level sensor
- Full body scale filter
- Max steam production: 3kg/h
- Max steam pressure: 0,002 Mpa
- Water conductivity range: see table

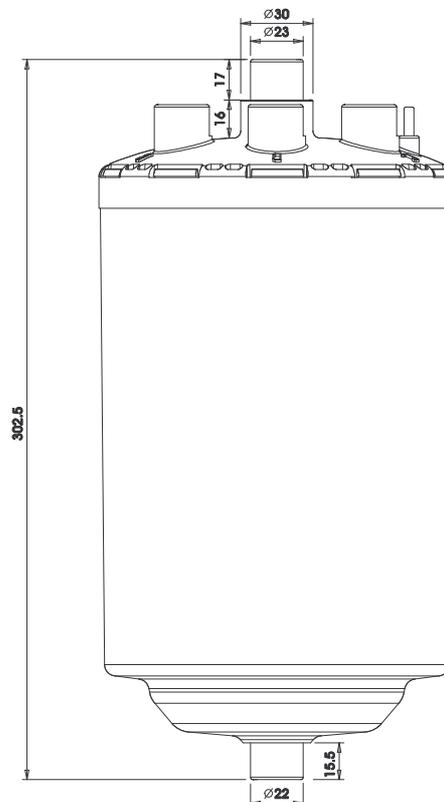

Approved water conductivity ranges:

Cylinder Model	VAC 3-phase	μ S/cm
BL0T1A00H1	200, 208, 230	75-350
BL0T1B00H1	200, 208, 230	350-1250
BL0T1A00H1	400	75-350
BL0T1C00H1	400	350-750
BL0T1D00H1	400	750-1250
BL0T1B00H1	460	75-350
BL0T1C00H1	575	75-350
BL0T1D00H1	460, 575	350-1250

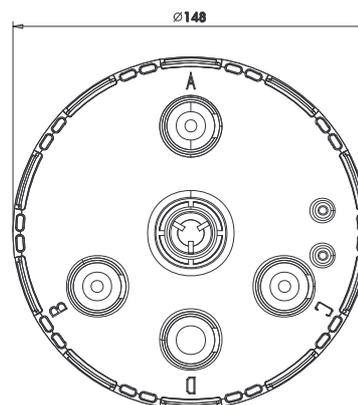

More details in Carel instruction sheet +050003970

CAREL

CAREL INDUSTRIES S.r.l. - Società Unipersonale
Via dell'Industria, 11 - 35020 Brugine - Padova - Italia
Tel. (+39) 049.9716611 - Fax (+39) 049.9716600
www.carel.com - e-mail: carel@carel.com

Cap. Soc. € 100.000 i.v.
C.C.I.A.A. Padova Reg. Imp n. 4359090281
Part. IVA e Cod. Fisc. 04359090281
Società soggetta ad attività di direzione e coordinamento di Carel S.p.A.

